

Appendix 7-6  
**Collision Risk Assessment**

Proposed Cahermurphy  
West Wind Farm





# Table of Contents

1.	<b>INTRODUCTION.....</b>	<b>2</b>
2.	<b>METHODOLOGY.....</b>	<b>2</b>
	2.1 Modelling Process.....	2
	2.2 Turbine Specifications.....	2
	2.3 Vantage Point Surveys.....	4
	2.4 Species Assessed.....	6
	2.5 Photoperiod.....	9
3.	<b>RESULTS.....</b>	<b>10</b>
	3.1 Stage A Flight Activity.....	10
	3.2 Stage B Number of Flights Through Rotors.....	11
	3.3 Stage C Probability of Collision.....	12
	3.4 Stage D Expected Collisions.....	13
	3.5 Stage E Allowing for Avoidance and Attraction.....	14
	3.6 Stage F Uncertainty.....	18
	3.7 Predicted Collision Rates.....	20
4.	<b>WORKED EXAMPLE.....</b>	<b>22</b>
	4.1 Proposed Development Scenario.....	22
	4.2 Bird Survey Scenario.....	22
	4.3 Stage A: Flight Activity.....	24
	4.4 Stage B: Number of Flights Through Rotors.....	27
	4.5 Stage C: Probability of Collision.....	27
	4.6 Stage D Expected Collisions.....	29
	4.7 Stage E Allowing for Avoidance and Attraction.....	29
	4.8 Stage F: Uncertainty.....	30
	4.9 Worked Example Collision Rates.....	30
5.	<b>BIBLIOGRAPHY.....</b>	<b>31</b>

# 1. INTRODUCTION

This document outlines the methodology used to conduct a collision risk assessment of the proposed Cahermurphy West Wind Farm. This assessment calculates an annual collision rate using a mathematical model to predict the number of birds that may be killed by collision with moving wind turbine rotor blades. The modelling method used is the Collision Risk Model provided by Band (2024). This method is recommended by NatureScot and provides a standardised approach to collision risk assessment for onshore wind farms. Note that these are theoretical predictions, therefore the results must be interpreted with a degree of caution.

## 2. METHODOLOGY

### 2.1 Modelling Process

The collision risk model estimates the number of collisions through the following stages:

- **Stage A Flight activity** - uses bird survey data to establish the density of flying birds in the vicinity of the turbines, and the proportion flying at a risk height (between the lowest and highest points of the rotors).
- **Stage B Number of flights through rotors** - makes an estimate, based on the bird density and proportion at risk height, of the potential number of bird passages through rotors. The initial assumption is that birds will continue to make flights within the area at the same intensity as before.
- **Stage C Probability of collision** - calculates the probability of collision during a single bird rotor transit.
- **Stage D Expected collisions** - multiplies the outputs of stage B and C to yield the potential collision rate for the bird species, assuming current levels of bird use of the site but allowing for the proportion of time that turbines are not operational.
- **Stage E Allowing for avoidance and attraction** - takes account of the proportion of birds likely to avoid the wind farm or its turbines, either because they have been displaced from the site or because they take evasive action or are attracted to the wind farm.
- **Stage F Uncertainty** - each of these five stages is followed by a further stage, stage F, which describes how to express the uncertainty surrounding a collision risk estimate.

The general features and assumptions of the collision risk model are discussed in further detail in Band (2024). Using the model, a final predicted annual collision rate can be predicted for each species that can be used in the impact assessment

### 2.2 Turbine Specifications

The turbine specifications used in the model are provided in Table 7 - 6 - 1 to Table 7 - 6 - 3. The expected operational time of the turbines is 85% according to report by the British Wind Energy Association (BWEA; 2007) which identifies the standard operational period of the wind turbines in the UK.

Table 7 - 6 - 1 Turbine specifications - Scenario 1

Component	Scenario Modelled
Latitude (°N)	52.76749
Turbine model	Nordex N163
Number of turbines	8
Hub height (m)	98.5
Rotor diameter (m)	163
Blade pitch (°)	6
Maximum blade width (m)	4.5

Component	Scenario Modelled
Rotational speed (rpm)	6.75
Number of blades	3

Table 7 - 6 - 2 Turbine specifications - Scenario 2

Component	Scenario Modelled
Latitude (°N)	52.76749
Turbine model	GE 5.5-158
Number of turbines	8
Hub height (m)	106
Rotor diameter (m)	158
Blade pitch (°)	6
Maximum blade width (m)	4
Rotational speed (rpm)	7.43
Number of blades	3

Table 7 - 6 - 3 Turbine specifications - Scenario 3

Component	Scenario Modelled
Latitude (°N)	52.76749
Turbine model	N149
Number of turbines	8
Hub height (m)	110.5
Rotor diameter (m)	149
Blade pitch (°)	6
Maximum blade width (m)	4.5
Rotational speed (rpm)	6.417
Number of blades	3

The turbine blade profile used in the model is presented in Table 7 - 6 - 4. In the absence of a specific blade profile for this turbine model, the blade profile provided in the collision risk model spreadsheet in Band (2024) has been used. This table provides the chord width values at 20 evenly spaced points along the blade, expressed relative to the maximum chord width. The ratio  $r/R$  represents the relative radial position along the blade, where 0 corresponds to the hub and 1 corresponds to the blade tip, while the ratio  $c/C$  represents the relative chord width. Further information on blade profiles is in Section 4 ‘Worked Example’.

Table 7 - 6 - 4 Turbine blade profile

$r/R$	$c/C$
0.00	0.690
0.05	0.730
0.10	0.790
0.15	0.880
0.20	0.960
0.25	1.000
0.30	0.980
0.35	0.920
0.40	0.850
0.45	0.800

r/R	c/C
0.50	0.750
0.55	0.700
0.60	0.640
0.65	0.580
0.70	0.520
0.75	0.470
0.80	0.410
0.85	0.370
0.90	0.300
0.95	0.240
1.00	0.000

2.3

## Vantage Point Surveys

The assessment is based on vantage point surveys to monitor flight activity undertaken between April 2023 and March 2025. This represents a 24-month period, consisting of two breeding seasons and two winter seasons, which is in full compliance with guidance from NatureScot (formerly Scottish Natural Heritage [SNH]) outlined in SNH (2017), which was revised in NatureScot (2025a). Surveys remain in accordance with the updated guidance.

Surveys were undertaken at four vantage points. Viewsheds were calculated using the Visibility Analysis plugin (Version 1.8) over a raster digital terrain model (DTM) in QGIS (Version 3.28). A point 1.75m in height (to represent the height of the surveyor) was created on a map using 10m contours terrain data, accounting for the relative height of any surrounding landscape features (e.g., trees). The software produced a 360° viewshed at 17m (Scenario 1), 27m (Scenario 2) and 36m (Scenario 3) from ground level up to a 2km radius around the vantage point. The combined viewsheds from these vantage points provided coverage to a 500m radius of the potential turbine positions. There is one turbine (T6) that is not covered by a vantage point survey at the lowest swept height. The Band Model (Band, 2025) can account for gaps in the viewshed, therefore this is not a significant limitation on the collision risk model. Furthermore, the habitats throughout the Wind Farm Site are predominantly commercial forestry and therefore, significant differences in the avian distribution and abundance is not anticipated within the viewshed gaps. The vantage points and the area watched (i.e., the area of the viewsheds) are listed in Table 7 - 6 - 5.

Table 7 - 6 - 5 Vantage points

Vantage Point	Area Watched (ha)		
	Scenario 1	Scenario 2	Scenario 3
VP1	489	578	605
VP2	514	607	626
VP3	193	297	459
VP4	256	316	356

Survey methodology followed SNH (2017; revised in NatureScot, 2025). The surveyor collected data on bird observations and flight activity from the scanning arc of 180° to a 2km radius at the fixed vantage point locations for two 3 hour watches separated by a minimum 30 minute break (i.e., 6 hours total) per month. The survey effort is presented in Table 7 - 6 - 6, expressed in terms of hours and seconds per month.

Table 7 - 6 - 6 Survey effort

Vantage Point	Month	Hours Survey	Seconds Survey
VP1	Jan	12	43,200



Vantage Point	Month	Hours Survey	Seconds Survey
VP2	Jan	12	43,200
VP3	Jan	12	43,200
VP4	Jan	12	43,200
VP1	Feb	12	43,200
VP2	Feb	12	43,200
VP3	Feb	12	43,200
VP4	Feb	12	43,200
VP1	Mar	12	43,200
VP2	Mar	12	43,200
VP3	Mar	12	43,200
VP4	Mar	12	43,200
VP1	Apr	12	43,200
VP2	Apr	12	43,200
VP3	Apr	12	43,200
VP4	Apr	12	43,200
VP1	May	12	43,200
VP2	May	12	43,200
VP3	May	12	43,200
VP4	May	12	43,200
VP1	Jun	12	43,200
VP2	Jun	12	43,200
VP3	Jun	12	43,200
VP4	Jun	12	43,200
VP1	Jul	12	43,200
VP2	Jul	12	43,200
VP3	Jul	12	43,200
VP4	Jul	12	43,200
VP1	Aug	12	43,200
VP2	Aug	12	43,200
VP3	Aug	12	43,200
VP4	Aug	12	43,200
VP1	Sep	12	43,200
VP2	Sep	12	43,200
VP3	Sep	12	43,200
VP4	Sep	12	43,200
VP1	Oct	12	43,200
VP2	Oct	12	43,200
VP3	Oct	12	43,200
VP4	Oct	12	43,200
VP1	Nov	12	43,200
VP2	Nov	12	43,200
VP3	Nov	12	43,200
VP4	Nov	12	43,200

Vantage Point	Month	Hours Survey	Seconds Survey
VP1	Dec	12	43,200
VP2	Dec	12	43,200
VP3	Dec	12	43,200
VP4	Dec	12	43,200

Flight activity of target species was mapped and recorded as per defined flight bands which were chosen in relation to the dimensions of potential turbine models at the outset of surveys. These heights bands were:

- > Band 1 = 0-15m
- > Band 2 = 15-25m
- > Band 3 = 25-200m
- > Band 4 = 200m+

As the risk height range of the turbine is 17-180m, all flight activity in Bands 1 and 2 are considered to be at potential collision height.

## 2.4

### Species Assessed

Collision rates were estimated for the species listed in Table 7 - 6 - 7. The months included for each species are also presented.

Table 7 - 6 - 7 Species assessed

Species	Months	Model
Hen Harrier	Oct-Sep	nondirectional
Kestrel	Oct-Sep	nondirectional
Snipe	Oct-Sep	nondirectional
Buzzard	Oct-Sep	nondirectional
Sparrowhawk	Oct-Sep	nondirectional

Species biometrics, such as body length, body width (i.e., wingspan) and flight speed, as well as whether a bird typically flaps or glides in flight, are required to calculate collision risk. This information was sourced from the best available literature.

In addition, a 'nocturnal activity factor is required'. There is considerable uncertainty about levels of bird flight activity by night (Band, 2024). There are no standard expert rankings available for terrestrial species and levels of activity may vary from season to season. Because of this, each species is ranked with a nocturnal activity factor of 0%, 25%, 50%, 75% and 100%. A ranking of 0% is given to represent hardly any flight activity at night and of 100% for much flight activity at night. As such, the figures used in the collision risk model take both day and night flights into account. The biometrics, flight type and nocturnal activity factor used in the model are presented in Table 7 - 6 - 8.

Table 7 - 6 - 8 Species biometrics, flight type and nocturnal activity factor

Species	Length (cm)	Width (cm)	Flight Speed (m/s)	Nocturnal Activity Factor	Flight Type
Buzzard	54	120.5	11.6	0%	gliding
Hen Harrier	48	110	8	0%	flapping
Kestrel	33.5	75.5	10.1	0%	flapping
Snipe	25.5	42	17.1	100%	flapping
Sparrowhawk	33	62.5	10	0%	flapping

To prepare the field survey data for analysis, the number of ‘bird-seconds’ per month per vantage point was calculated for each observation by multiplying the number of birds aloft by the duration of the flight (in seconds). This included time spent in all recorded height bands, not just those bands within potential collision height. These values are presented per vantage point per month for each species in Table 7 - 6 - 9.

Table 7 - 6 - 9 Bird-seconds per vantage point per month

Species	Month	Vantage Point	Bird-Seconds
Buzzard	May	VP1	25
	Jun	VP1	110
	Apr	VP2	35
	Jun	VP2	15
	Oct	VP2	50
	Nov	VP2	8
	Jan	VP3	90
	Feb	VP3	30
	Mar	VP3	80
	Jun	VP3	10
	Jun	VP4	60
	Sep	VP4	130
Hen Harrier	Jan	VP1	100
	Mar	VP1	78
	Apr	VP1	70
	May	VP1	4
	Aug	VP1	28
	Nov	VP1	85
	Dec	VP1	45
	Jan	VP2	59
	Apr	VP2	355
	Apr	VP3	80
	Nov	VP3	25
	Jan	VP4	50
Kestrel	Feb	VP1	45
	Jul	VP1	110
	Aug	VP1	152
	Sep	VP1	323
	Oct	VP1	117
	Dec	VP1	40
	Jan	VP2	37
	Mar	VP2	105
	Apr	VP2	150
	May	VP2	82
	Jun	VP2	30
	Jul	VP2	230
	Aug	VP2	132
	Sep	VP2	23

Species	Month	Vantage Point	Bird-Seconds
	Oct	VP2	210
	Nov	VP2	25
	Dec	VP2	285
	Feb	VP3	20
	Mar	VP3	360
	Apr	VP3	9
	Jun	VP3	265
	Jul	VP3	15,918
	Aug	VP3	690
	Sep	VP3	515
	Oct	VP3	373
	Nov	VP3	15
	Dec	VP3	67
	Jan	VP4	20
	Feb	VP4	637
	Mar	VP4	30
	Apr	VP4	90
	Jun	VP4	30
	Jul	VP4	1,040
	Aug	VP4	316
	Sep	VP4	120
	Oct	VP4	50
	Nov	VP4	41
	Dec	VP4	495
Snipe	Apr	VP1	16
	Oct	VP1	16
	Feb	VP2	45
	Mar	VP2	8
	Oct	VP2	15
	Nov	VP2	10
	Dec	VP2	31
	Feb	VP3	30
	Oct	VP4	27
	Dec	VP4	55
Sparrowhawk	Oct	VP2	20
	Oct	VP3	40
	Jan	VP4	12
	Aug	VP4	20
	Sep	VP4	45
	Oct	VP4	135

2.5

## Photoperiod

The photoperiod at the latitude of the turbines was acquired for the survey period. The daylight and nighttime hours per month are shown in Table 7 - 6 - 10. The total daylight hours was 4,485 and nighttime hours was 4,275.

Table 7 - 6 - 10 Photoperiod

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Daylight Hours	254.6	275.2	366.5	417.3	488.5	503.5	506.8	457	382.1	330.7	263.5	239.2
Nighttime Hours	489.4	396.8	377.5	302.7	255.5	216.5	237.2	287	337.9	413.3	456.5	504.8

### 3. RESULTS

#### 3.1 Stage A Flight Activity

Stage A of the modelling process uses the field survey data to establish the aerial density of flying birds in the vicinity of the turbines and the proportion flying at a risk height (between the lowest and highest points of the rotors). Aerial density was calculated following the formula provided by Band (2024; also see Section 4 ‘Worked Example’). Similarly, the proportion flying at risk height was calculated following the method in Band (2024; also see Section 4 ‘Worked Example’). The aerial density per month and the proportion flying at risk height for each species is shown in Table 7 - 6 - 11 to Table 7 - 6 - 13.

Table 7 - 6 - 11 Aerial density and proportion flying at risk height - Scenario 1

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Proportion
Hen Harrier	0.000298	0	0.0000923	0.000722	0.00000473	0	0	0.0000331	0	0	0.000176	0.0000533	0.27
Kestrel	0.0000869	0.00155	0.00127	0.000399	0.0000923	0.000896	0.0505	0.00311	0.00222	0.00161	0.000166	0.00169	0.94
Snipe	0	0.000141	0.00000901	0.0000189	0	0	0	0	0	0.0000969	0.0000113	0.000159	0.39
Buzzard	0.00027	0.00009	0.00024	0.0000394	0.0000296	0.000313	0	0	0.000294	0.0000563	0.00000901	0	0.87
Sparrowhawk	0.0000271	0	0	0	0	0	0	0.0000452	0.000102	0.000448	0	0	0.42

Table 7 - 6 - 12 Aerial density and proportion flying at risk height - Scenario 2

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Proportion
Hen Harrier	0.000248	0	0.0000781	0.000564	0.000004	0	0	0.000028	0	0	0.000134	0.0000451	0.19
Kestrel	0.0000719	0.00125	0.000857	0.000325	0.0000782	0.0006	0.0333	0.0022	0.00157	0.00114	0.000128	0.00135	0.39
Snipe	0	0.000101	0.00000763	0.000016	0	0	0	0	0	0.0000798	0.00000953	0.00013	0.14
Buzzard	0.000175	0.0000585	0.000156	0.0000334	0.000025	0.000254	0	0	0.000238	0.0000477	0.00000763	0	0.69
Sparrowhawk	0.000022	0	0	0	0	0	0	0.0000366	0.0000824	0.000344	0	0	0.15



Table 7 - 6 - 13 Aerial density and proportion flying at risk height - Scenario 3

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Proportion
Hen Harrier	0.000231	0	0.0000746	0.000496	0.00000383	0	0	0.0000268	0	0	0.000113	0.000043	0.18
Kestrel	0.0000667	0.0011	0.0006	0.000296	0.0000758	0.000411	0.0221	0.00165	0.00117	0.000858	0.000109	0.00119	0.36
Snipe	0	0.0000794	0.0000074	0.0000153	0	0	0	0	0	0.0000731	0.00000924	0.000118	0.13
Buzzard	0.000113	0.0000378	0.000101	0.0000324	0.0000239	0.000229	0	0	0.000211	0.0000462	0.0000074	0	0.66
Sparrowhawk	0.0000195	0	0	0	0	0	0	0.0000325	0.0000732	0.000288	0	0	0.14

## 3.2 Stage B Number of Flights Through Rotors

Stage B of the modelling process makes an estimate, based on the aerial density and proportion flying at risk height, of the potential number of bird passages through rotors. The projected number of transits through the rotor risk area was calculated following the formula provided by Band (2024; also see Section 4 ‘Worked Example’). Table 7 - 6 - 14 to Table 7 - 6 - 16 shows the projected number of transits per month for each species.

Table 7 - 6 - 14 Projected number of transits - Scenario 1

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Hen Harrier	0.61	0	0.272	2.42	0.019	0	0	0.122	0	0	0.372	0.102	3.92
Kestrel	0.771	14.9	16.2	5.81	1.57	15.7	892	49.6	29.6	18.5	1.52	14.1	1060.34
Snipe	0	2.31	0.164	0.334	0	0	0	0	0	1.76	0.198	2.9	7.67
Buzzard	2.56	0.922	3.27	0.612	0.538	5.86	0	0	4.18	0.693	0.088	0	18.73
Sparrowhawk	0.107	0	0	0	0	0	0	0.32	0.603	2.3	0	0	3.32

Table 7 - 6 - 15 Projected number of transits - Scenario 2

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Hen Harrier	0.343	0	0.156	1.28	0.011	0	0	0.07	0	0	0.192	0.059	2.11
Kestrel	0.255	4.8	4.37	1.89	0.532	4.21	235	14	8.35	5.23	0.47	4.5	283.40
Snipe	0	0.579	0.048	0.098	0	0	0	0	0	0.504	0.058	0.823	2.11
Buzzard	1.29	0.463	1.65	0.401	0.352	3.68	0	0	2.62	0.454	0.058	0	10.96

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Sparrowhawk	0.03	0	0	0	0	0	0	0.09	0.169	0.613	0	0	0.90

Table 7 - 6 - 16 Projected number of transits - Scenario 3

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Hen Harrier	0.285	0	0.132	1	0.009	0	0	0.059	0	0	0.144	0.05	1.68
Kestrel	0.211	3.77	2.72	1.53	0.459	2.56	139	9.35	5.56	3.52	0.355	3.53	172.26
Snipe	0	0.403	0.042	0.083	0	0	0	0	0	0.411	0.05	0.664	1.65
Buzzard	0.74	0.267	0.948	0.346	0.299	2.96	0	0	2.07	0.392	0.05	0	8.07
Sparrowhawk	0.024	0	0	0	0	0	0	0.071	0.134	0.457	0	0	0.69

### 3.3

## Stage C Probability of Collision

Stage C of the modelling process calculates the probability of collision during a single bird rotor transit. The likelihood of a bird colliding with a turbine blade during a single pass through the rotor was calculated using the turbine specifications, species biometrics and flight characteristics outlined in the previous sections.

Collision risk was assessed across different parts of the rotor, as blade speed and width varies from the hub to the tip. Because of the geometry of the blades in relation to the flight direction, the collision risk for upwind flight is higher than for downwind (even if the bird's flight speed relative to the ground is taken to be the same), therefore collision risk probabilities were calculated separately for birds flying upwind and downwind. These were then averaged assuming a 50:50 weighting because both upwind and downwind flights are equally likely (further information in Section 4 'Worked Example'). This produced a probability of collision for a bird during a single transit of the rotor, which is presented for each species in Table 7 - 6 - 17 to Table 7 - 6 - 19.

Table 7 - 6 - 17 Probability of collision - Scenario 1

Species	Upwind	Downwind	Average
Hen Harrier	0.066	0.045	0.056
Kestrel	0.055	0.038	0.047
Snipe	0.045	0.035	0.04
Buzzard	0.058	0.044	0.051
Sparrowhawk	0.055	0.037	0.046

Table 7 - 6 - 18 Probability of collision - Scenario 2

Species	Upwind	Downwind	Average
Hen Harrier	0.065	0.044	0.055
Kestrel	0.053	0.037	0.045
Snipe	0.042	0.033	0.038
Buzzard	0.057	0.042	0.05
Sparrowhawk	0.053	0.036	0.044

Table 7 - 6 - 19 Probability of collision - Scenario 3

Species	Upwind	Downwind	Average
Hen Harrier	0.069	0.048	0.058
Kestrel	0.058	0.042	0.05
Snipe	0.048	0.038	0.043
Buzzard	0.061	0.047	0.054
Sparrowhawk	0.057	0.041	0.049

3.4

## Stage D Expected Collisions

Stage D of the modelling process multiplies the outputs of stage B and C to yield the expected collision rate for each bird species, accounting for the proportion of time the wind farm is expected to be operational. This is before considering avoidance behaviour, which is stage E. The number of expected collisions per month and the year total for each species are presented in Table 7 - 6 - 20 to Table 7 - 6 - 22.

Table 7 - 6 - 20 Expected collisions without avoidance - Scenario 1

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.0289	0	0.0129	0.115	0.000901	0	0	0.00579	0	0	0.0176	0.00484	0.186
Kestrel	0.0305	0.589	0.64	0.23	0.0622	0.622	35.3	1.96	1.17	0.733	0.0603	0.557	41.9
Snipe	0	0.0784	0.00556	0.0113	0	0	0	0	0	0.0598	0.00672	0.0983	0.26
Buzzard	0.111	0.0399	0.142	0.0265	0.0233	0.254	0	0	0.181	0.03	0.00381	0	0.81



Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Sparrowhawk	0.00418	0	0	0	0	0	0	0.0125	0.0236	0.0897	0	0	0.13

Table 7 - 6 - 21 Expected collisions without avoidance - Scenario 2

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.016	0	0.00728	0.0598	0.000514	0	0	0.00327	0	0	0.00897	0.00275	0.0986
Kestrel	0.00971	0.183	0.166	0.072	0.0203	0.16	8.94	0.534	0.318	0.199	0.0179	0.171	10.8
Snipe	0	0.0185	0.00153	0.00313	0	0	0	0	0	0.0161	0.00185	0.0263	0.0674
Buzzard	0.0542	0.0195	0.0694	0.0169	0.0148	0.155	0	0	0.11	0.0191	0.00245	0	0.462
Sparrowhawk	0.00113	0	0	0	0	0	0	0.00338	0.00635	0.023	0	0	0.0339

Table 7 - 6 - 22 Expected collisions without avoidance - Scenario 3

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.0142	0	0.00656	0.0497	0.000447	0	0	0.00293	0	0	0.00716	0.00248	0.0835
Kestrel	0.00889	0.159	0.115	0.0646	0.0193	0.108	5.84	0.394	0.234	0.148	0.015	0.149	7.26
Snipe	0	0.0148	0.00154	0.00304	0	0	0	0	0	0.0151	0.00183	0.0243	0.0606
Buzzard	0.0338	0.0122	0.0432	0.0158	0.0136	0.135	0	0	0.0944	0.0179	0.00228	0	0.368
Sparrowhawk	0.000997	0	0	0	0	0	0	0.00295	0.00557	0.019	0	0	0.0285

### 3.5 Stage E Allowing for Avoidance and Attraction

Stage E of the modelling process takes account of the proportion of birds likely to avoid the wind farm or its turbines, either because they have been displaced from the site or because they take evasive action or are attracted to the wind farm. Band (2024) states that the collision rate estimate should show potential collision mortality using a range of assumed avoidance rates. In the absence of specific avoidance information for the species in question, it is recommended that collision risks be evaluated assuming avoidance factors of 95%, 98%, 99%, 99.5% and 99.6%. These are presented in Table 7 - 6 - 23 to Table 7 - 6 - 25.



Table 7 - 6 - 23 Expected collisions with avoidance - Scenario 1

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.95	0.00145	0	0.00064	0.00575	0.00005	0	0	0.00029	0	0	0.00088	0.00024	0.0093
	0.98	0.00058	0	0.00026	0.0023	0.00002	0	0	0.00012	0	0	0.00035	0.0001	0.00372
	0.99	0.00029	0	0.00013	0.00115	0.00001	0	0	0.00006	0	0	0.00018	0.00005	0.00186
	0.995	0.00014	0	0.00006	0.00057	0	0	0	0.00003	0	0	0.00009	0.00002	0.00093
	0.996	0.00012	0	0.00005	0.00046	0	0	0	0.00002	0	0	0.00007	0.00002	0.00074
Kestrel	0.95	0.00152	0.0295	0.032	0.0115	0.00311	0.0311	1.76	0.098	0.0586	0.0366	0.00301	0.0278	2.1
	0.98	0.00061	0.0118	0.0128	0.0046	0.00124	0.0124	0.705	0.0392	0.0234	0.0146	0.00121	0.0111	0.839
	0.99	0.0003	0.00589	0.0064	0.0023	0.00062	0.00622	0.353	0.0196	0.0117	0.00733	0.0006	0.00557	0.419
	0.995	0.00015	0.00295	0.0032	0.00115	0.00031	0.00311	0.176	0.00981	0.00586	0.00366	0.0003	0.00278	0.21
	0.996	0.00012	0.00236	0.00256	0.00092	0.00025	0.00249	0.141	0.00784	0.00469	0.00293	0.00024	0.00223	0.168
Snipe	0.95	0	0.00392	0.00028	0.00057	0	0	0	0	0	0.00299	0.00034	0.00492	0.013
	0.98	0	0.00157	0.00011	0.00023	0	0	0	0	0	0.0012	0.00013	0.00197	0.0052
	0.99	0	0.00078	0.00006	0.00011	0	0	0	0	0	0.0006	0.00007	0.00098	0.0026
	0.995	0	0.00039	0.00003	0.00006	0	0	0	0	0	0.0003	0.00003	0.00049	0.0013
	0.996	0	0.00031	0.00002	0.00005	0	0	0	0	0	0.00024	0.00003	0.00039	0.00104
Buzzard	0.95	0.00553	0.00199	0.00708	0.00132	0.00116	0.0127	0	0	0.00904	0.0015	0.00019	0	0.0405
	0.98	0.00221	0.0008	0.00283	0.00053	0.00047	0.00507	0	0	0.00362	0.0006	0.00008	0	0.0162
	0.99	0.00111	0.0004	0.00142	0.00026	0.00023	0.00254	0	0	0.00181	0.0003	0.00004	0	0.0081
	0.995	0.00055	0.0002	0.00071	0.00013	0.00012	0.00127	0	0	0.0009	0.00015	0.00002	0	0.00405
	0.996	0.00044	0.00016	0.00057	0.00011	0.00009	0.00101	0	0	0.00072	0.00012	0.00002	0	0.00324
Sparrowhawk	0.95	0.00021	0	0	0	0	0	0	0.00063	0.00118	0.00448	0	0	0.00649
	0.98	0.00008	0	0	0	0	0	0	0.00025	0.00047	0.00179	0	0	0.0026
	0.99	0.00004	0	0	0	0	0	0	0.00013	0.00024	0.0009	0	0	0.0013
	0.995	0.00002	0	0	0	0	0	0	0.00006	0.00012	0.00045	0	0	0.00065
	0.996	0.00002	0	0	0	0	0	0	0.00005	0.00009	0.00036	0	0	0.00052



Table 7 - 6 - 24 Expected collisions with avoidance - Scenario 2

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.95	0.0008	0	0.00036	0.00299	0.00003	0	0	0.00016	0	0	0.00045	0.00014	0.00493
	0.98	0.00032	0	0.00015	0.0012	0.00001	0	0	0.00007	0	0	0.00018	0.00006	0.00197
	0.99	0.00016	0	0.00007	0.0006	0.00001	0	0	0.00003	0	0	0.00009	0.00003	0.00099
	0.995	0.00008	0	0.00004	0.0003	0	0	0	0.00002	0	0	0.00004	0.00001	0.00049
	0.996	0.00006	0	0.00003	0.00024	0	0	0	0.00001	0	0	0.00004	0.00001	0.00039
Kestrel	0.95	0.00049	0.00913	0.00832	0.0036	0.00101	0.00801	0.447	0.0267	0.0159	0.00996	0.00089	0.00856	0.539
	0.98	0.00019	0.00365	0.00333	0.00144	0.00041	0.0032	0.179	0.0107	0.00636	0.00398	0.00036	0.00342	0.216
	0.99	0.0001	0.00183	0.00166	0.00072	0.0002	0.0016	0.0894	0.00534	0.00318	0.00199	0.00018	0.00171	0.108
	0.995	0.00005	0.00091	0.00083	0.00036	0.0001	0.0008	0.0447	0.00267	0.00159	0.001	0.00009	0.00086	0.0539
	0.996	0.00004	0.00073	0.00067	0.00029	0.00008	0.00064	0.0357	0.00213	0.00127	0.0008	0.00007	0.00068	0.0432
Snipe	0.95	0	0.00092	0.00008	0.00016	0	0	0	0	0	0.0008	0.00009	0.00131	0.00337
	0.98	0	0.00037	0.00003	0.00006	0	0	0	0	0	0.00032	0.00004	0.00053	0.00135
	0.99	0	0.00018	0.00002	0.00003	0	0	0	0	0	0.00016	0.00002	0.00026	0.00067
	0.995	0	0.00009	0.00001	0.00002	0	0	0	0	0	0.00008	0.00001	0.00013	0.00034
	0.996	0	0.00007	0.00001	0.00001	0	0	0	0	0	0.00006	0.00001	0.00011	0.00027
Buzzard	0.95	0.00271	0.00098	0.00347	0.00085	0.00074	0.00776	0	0	0.00552	0.00096	0.00012	0	0.0231
	0.98	0.00108	0.00039	0.00139	0.00034	0.0003	0.0031	0	0	0.00221	0.00038	0.00005	0	0.00924
	0.99	0.00054	0.0002	0.00069	0.00017	0.00015	0.00155	0	0	0.0011	0.00019	0.00002	0	0.00462
	0.995	0.00027	0.0001	0.00035	0.00008	0.00007	0.00078	0	0	0.00055	0.0001	0.00001	0	0.00231
	0.996	0.00022	0.00008	0.00028	0.00007	0.00006	0.00062	0	0	0.00044	0.00008	0.00001	0	0.00185
Sparrowhawk	0.95	0.00006	0	0	0	0	0	0	0.00017	0.00032	0.00115	0	0	0.0017
	0.98	0.00002	0	0	0	0	0	0	0.00007	0.00013	0.00046	0	0	0.00068
	0.99	0.00001	0	0	0	0	0	0	0.00003	0.00006	0.00023	0	0	0.00034
	0.995	0.00001	0	0	0	0	0	0	0.00002	0.00003	0.00012	0	0	0.00017
	0.996	0	0	0	0	0	0	0	0.00001	0.00003	0.00009	0	0	0.00014



Table 7 - 6 - 25 Expected collisions with avoidance - Scenario 3

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Hen Harrier	0.95	0.00071	0	0.00033	0.00249	0.00002	0	0	0.00015	0	0	0.00036	0.00012	0.00417
	0.98	0.00028	0	0.00013	0.00099	0.00001	0	0	0.00006	0	0	0.00014	0.00005	0.00167
	0.99	0.00014	0	0.00007	0.0005	0	0	0	0.00003	0	0	0.00007	0.00002	0.00083
	0.995	0.00007	0	0.00003	0.00025	0	0	0	0.00001	0	0	0.00004	0.00001	0.00042
	0.996	0.00006	0	0.00003	0.0002	0	0	0	0.00001	0	0	0.00003	0.00001	0.00033
Kestrel	0.95	0.00044	0.00793	0.00574	0.00323	0.00097	0.0054	0.292	0.0197	0.0117	0.00741	0.00075	0.00744	0.363
	0.98	0.00018	0.00317	0.0023	0.00129	0.00039	0.00216	0.117	0.00788	0.00469	0.00296	0.0003	0.00297	0.145
	0.99	0.00009	0.00159	0.00115	0.00065	0.00019	0.00108	0.0584	0.00394	0.00234	0.00148	0.00015	0.00149	0.0726
	0.995	0.00004	0.00079	0.00057	0.00032	0.0001	0.00054	0.0292	0.00197	0.00117	0.00074	0.00007	0.00074	0.0363
	0.996	0.00004	0.00063	0.00046	0.00026	0.00008	0.00043	0.0234	0.00158	0.00094	0.00059	0.00006	0.00059	0.029
Snipe	0.95	0	0.00074	0.00008	0.00015	0	0	0	0	0	0.00075	0.00009	0.00122	0.00303
	0.98	0	0.0003	0.00003	0.00006	0	0	0	0	0	0.0003	0.00004	0.00049	0.00121
	0.99	0	0.00015	0.00002	0.00003	0	0	0	0	0	0.00015	0.00002	0.00024	0.00061
	0.995	0	0.00007	0.00001	0.00002	0	0	0	0	0	0.00008	0.00001	0.00012	0.0003
	0.996	0	0.00006	0.00001	0.00001	0	0	0	0	0	0.00006	0.00001	0.0001	0.00024
Buzzard	0.95	0.00169	0.00061	0.00216	0.00079	0.00068	0.00675	0	0	0.00472	0.00089	0.00011	0	0.0184
	0.98	0.00068	0.00024	0.00086	0.00032	0.00027	0.0027	0	0	0.00189	0.00036	0.00005	0	0.00736
	0.99	0.00034	0.00012	0.00043	0.00016	0.00014	0.00135	0	0	0.00094	0.00018	0.00002	0	0.00368
	0.995	0.00017	0.00006	0.00022	0.00008	0.00007	0.00067	0	0	0.00047	0.00009	0.00001	0	0.00184
	0.996	0.00014	0.00005	0.00017	0.00006	0.00005	0.00054	0	0	0.00038	0.00007	0.00001	0	0.00147
Sparrowhawk	0.95	0.00005	0	0	0	0	0	0	0.00015	0.00028	0.00095	0	0	0.00143
	0.98	0.00002	0	0	0	0	0	0	0.00006	0.00011	0.00038	0	0	0.00057
	0.99	0.00001	0	0	0	0	0	0	0.00003	0.00006	0.00019	0	0	0.00029
	0.995	0	0	0	0	0	0	0	0.00001	0.00003	0.00009	0	0	0.00014
	0.996	0	0	0	0	0	0	0	0.00001	0.00002	0.00008	0	0	0.00011

3.6

## Stage F Uncertainty

There are many sources of variability or uncertainty in the output of the Collision Risk Model. The main sources of uncertainty outlined in Band (2024) are:

- › survey data is sampled, often both in time and space, and usually exhibits a high degree of variability. Mean estimates can only be representative of flight activity;
- › survey data is unavailable for certain conditions, including nighttime and storm conditions;
- › natural variability in bird populations, over time and space, for ecological reasons;
- › flight height information may be subject to observer bias;
- › the collision risk model uses a simplified geometry for turbine blades and bird shape;
- › it does not include any risk of collision with turbine towers;
- › details of blade dimension and pitch may be unavailable when making the estimate;
- › turbines deployed may differ from those used in the collision risk analysis;
- › bird parameters (length, wingspan, flight speed) are not fixed but have a distribution;
- › bird speed is not a constant but is dependent on wind speed;
- › insufficient knowledge about bird displacement and attraction effects;
- › there is limited firm information on bird avoidance behaviour.

Because of this, a range of uncertainty is calculated for the predicted collision rates. The range of uncertainty should reflect:

- › uncertainty or variability in flight activity data (including imprecision on flight height estimates and lack of knowledge about night-time behaviour);
- › uncertainty due to the limitations of the collision model, including the variability of bird dimensions and flight speed, the simplification in shape of a bird and turbine blades;
- › uncertainty arising from turbine options yet to be decided, in number, size and speed. These options should include a ‘worst case’ in terms of the option likely to present greatest bird collision risk.

To provide a measure of uncertainty in aerial density, the mean, standard deviation and relative standard error of the mean for the monthly values was calculated (see Section 4 ‘Worked Example’). Uncertainty due to simplifications in the collision risk model was assumed to be 0.20 (Band, 2024). Finally, uncertainty due to design options (including the blade profile, pitch, rotational speed and expected time operational) was considered to be 0.28. The overall range of uncertainty for each species is presented in Table 7 - 6 - 26 to Table 7 - 6 - 28.

Table 7 - 6 - 26 Range of uncertainty - Scenario 1

Species	Months	Model	Mean	Standard Deviation	Standard Error of the Mean	Relative Standard Error	Uncertainty
Hen Harrier	Oct-Sep	non-directional	0.00011	0.0002	0.00006	0.5103	0.62

Species	Months	Model	Mean	Standard Deviation	Standard Error of the Mean	Relative Standard Error	Uncertainty
Kestrel	Oct-Sep	non-directional	0.0053	0.01365	0.00394	0.74392	0.82
Snipe	Oct-Sep	non-directional	0.00004	0.00006	0.00002	0.45444	0.57
Buzzard	Oct-Sep	non-directional	0.00011	0.00012	0.00004	0.31518	0.47
Sparrowhawk	Oct-Sep	non-directional	0.00005	0.00012	0.00004	0.68488	0.77

Table 7 - 6 - 27 Range of uncertainty - Scenario 2

Species	Months	Model	Mean	Standard Deviation	Standard Error of the Mean	Relative Standard Error	Uncertainty
Hen Harrier	Oct-Sep	non-directional	0.00009	0.00016	0.00005	0.50209	0.61
Kestrel	Oct-Sep	non-directional	0.00357	0.00897	0.00259	0.72593	0.8
Snipe	Oct-Sep	non-directional	0.00003	0.00004	0.00001	0.4507	0.57
Buzzard	Oct-Sep	non-directional	0.00008	0.00009	0.00003	0.31945	0.47
Sparrowhawk	Oct-Sep	non-directional	0.00004	0.00009	0.00003	0.67565	0.76

Table 7 - 6 - 28 Range of uncertainty - Scenario 3

Species	Months	Model	Mean	Standard Deviation	Standard Error of the Mean	Relative Standard Error	Uncertainty
Hen Harrier	Oct-Sep	non-directional	0.00008	0.00014	0.00004	0.49457	0.6
Kestrel	Oct-Sep	non-directional	0.00247	0.00593	0.00171	0.69407	0.77
Snipe	Oct-Sep	non-directional	0.00003	0.00004	0.00001	0.44763	0.56
Buzzard	Oct-Sep	non-directional	0.00007	0.00008	0.00002	0.33389	0.48
Sparrowhawk	Oct-Sep	non-directional	0.00003	0.00008	0.00002	0.6653	0.75

### 3.7

## Predicted Collision Rates

To provide a best estimate of the collision rate for each species, the guidance on avoidance rates provided in NatureScot (2025b) was consulted. This guidance suggests the most appropriate avoidance rate for each species; however it should be noted that the lack of research on most species' avoidance rates means that the confidence interval of the prediction may extend from the lowest to the highest avoidance rate in

Table 7 - 6 - 23 to Table 7 - 6 - 25. For each species, the predicted number of collisions corresponding to the recommended avoidance rate was identified. These are presented in Table 7 - 6 - 29 to Table 7 - 6 - 31, along with the range of uncertainty, the predicted number of collisions over the operational lifetime of the facility and an estimation of the number of years for one collision to occur (details on these calculations are shown in Section 4 ‘Worked Example’).

Table 7 - 6 - 29 to Table 7 - 6 - 31 presents the final predicted annual collision rate used for the assessment. The results should be considered as a best estimate of collision risk, rather than a precise figure.

Table 7 - 6 - 29 Predicted collision rates - Scenario 1

Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Hen Harrier	Oct-Sep	non-directional	0.99	0.002	0.001-0.003	0.07	>35
Kestrel	Oct-Sep	non-directional	0.95	2.096	0.377-3.815	73.36	<1
Snipe	Oct-Sep	non-directional	0.98	0.005	0.002-0.008	0.175	>35
Buzzard	Oct-Sep	non-directional	0.98	0.016	0.009-0.024	0.56	>35
Sparrowhawk	Oct-Sep	non-directional	0.98	0.003	0.001-0.005	0.105	>35

Table 7 - 6 - 30 Predicted collision rates - Scenario 2

Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Hen Harrier	Oct-Sep	non-directional	0.99	0.001	0.000-0.002	0.035	>35
Kestrel	Oct-Sep	non-directional	0.95	0.539	0.108-0.971	18.865	2
Snipe	Oct-Sep	non-directional	0.98	0.001	0.001-0.002	0.035	>35
Buzzard	Oct-Sep	non-directional	0.98	0.009	0.005-0.014	0.315	>35
Sparrowhawk	Oct-Sep	non-directional	0.98	0.001	0.000-0.001	0.035	>35

Table 7 - 6 - 31 Predicted collision rates - Scenario 3

Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Hen Harrier	Oct-Sep	non-directional	0.99	0.001	0.000-0.001	0.035	>35
Kestrel	Oct-Sep	non-directional	0.95	0.363	0.083-0.642	12.705	3



Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Snipe	Oct-Sep	non-directional	0.98	0.001	0.001-0.002	0.035	>35
Buzzard	Oct-Sep	non-directional	0.98	0.007	0.004-0.011	0.245	>35
Sparrowhawk	Oct-Sep	non-directional	0.98	0.001	0.000-0.001	0.035	>35

## 4. WORKED EXAMPLE

This section provides a worked example of the collision rate prediction for sparrowhawk at an imaginary facility. This example is deliberately simplified to assist readers with following the steps. The prediction is made using a short imaginary dataset presented in Section 4.2.

### 4.1 Proposed Development Scenario

In this example, a wind farm is proposed in farmland at a latitude of 53.4°N. The development consists of seven turbines. Each turbine has a hub height of 105m and rotor diameter of 150m, giving a rotor-swept height range of 30-180m. The turbines have a blade radius (**R**) of 75m, a blade pitch ( $\lambda$ ) of 6°, and a maximum blade chord width (**C**) of 4.2m. Each turbine has 3 blades (**b**) and operates at an average rotational speed ( $\Omega$ ) of 11.4rpm. The proposed operational lifetime of 35 years, with turbines expected to be operational approximately 85% of the time.

The blade profile of the turbines is presented in Table 7 - 6 - 32. This table provides the chord width values at 20 evenly spaced points along the blade, expressed relative to the maximum chord width. In this context, **r** denotes the distance from the hub, and **R** represents the total blade length (i.e., the rotor radius). The ratio **r/R** therefore represents the relative radial position along the blade, where 0 corresponds to the hub and 1 corresponds to the blade tip. Similarly, **c** represents the chord width at a given distance (**r**) from the hub, and **C** is the maximum chord width of the blade. Therefore, the ratio **c/C** represents the relative chord width.

Table 7 - 6 - 32 Blade profile of the turbines

<b>r/R</b>	<b>c/C</b>
0.00	0.690
0.05	0.730
0.10	0.790
0.15	0.880
0.20	0.960
0.25	1.000
0.30	0.980
0.35	0.920
0.40	0.850
0.45	0.800
0.50	0.750
0.55	0.700
0.60	0.640
0.65	0.580
0.70	0.520
0.75	0.470
0.80	0.410
0.85	0.370
0.90	0.300
0.95	0.240
1.00	0.000

### 4.2 Bird Survey Scenario

In this example, bird surveys were conducted at the proposed wind farm site for a two year period (April 2023 to March 2025). Vantage point surveys to monitor flight activity were undertaken at two vantage

points. The combined viewsheds from these vantage points provided at least 500m coverage around all turbines in addition to coverage of the site and surrounds (Figure 7 - 6 - 1). The total viewshed area was 5.23km<sup>2</sup> for VP1 and 5.92km<sup>2</sup> for VP2.

Both vantage points were surveyed for 6 hours per month throughout the survey period, totalling 144 hours of survey at each location. For each recorded flight, the duration (in seconds) that bird spent within pre-defined height bands was recorded. These heights bands were:

- > Band 1 = 0-15m
- > Band 2 = 15-25m
- > Band 3 = 25-200m
- > Band 4 = 200m+

As the risk height range of the turbine is 30-180m, all flight activity in Band 3 is considered to be at potential collision height.

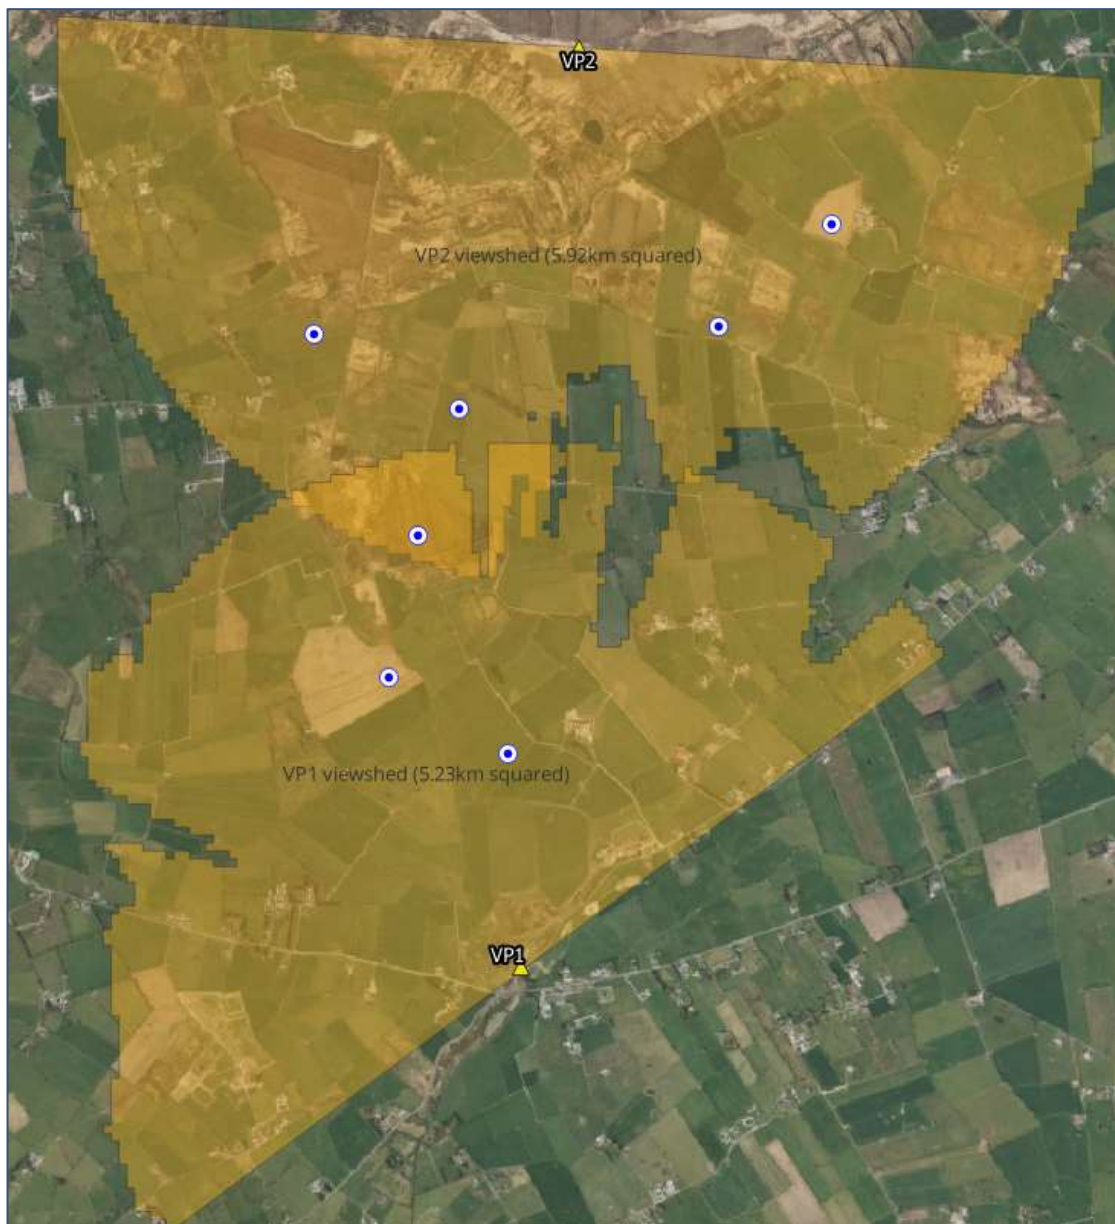


Figure 7 - 6 - 1 Vantage point survey locations and viewshed areas

In this example, a collision risk model will be conducted for the species sparrowhawk. All records for sparrowhawk collected during vantage point surveys are presented in Table 7 - 6 - 33. Records denoted ‘-’ represent non-flight activity, for example when a bird is perched.

The data in Table 7 - 6 - 33 shows that sparrowhawk was present at the site throughout the survey period, in both the breeding and winter season. Therefore, all months of the year will be modelled.

Table 7 - 6 - 33 Sparrowhawk records from vantage point surveys

VP	Date	Time	Species	Number	Band 1	Band 2	Band 3	Band 4
VP2	17/11/2023	07:36	Sparrowhawk	1	17	0	0	0
VP2	17/11/2023	07:43	Sparrowhawk	1	-	-	-	-
VP1	12/12/2023	11:24	Sparrowhawk	1	-	-	-	-
VP1	12/01/2024	12:14	Sparrowhawk	2	14	0	15	0
VP2	30/01/2024	11:34	Sparrowhawk	1	87	0	0	0
VP2	21/02/2024	16:19	Sparrowhawk	1	35	0	0	0
VP1	14/03/2024	11:48	Sparrowhawk	1	50	12	0	0
VP1	03/05/2024	11:25	Sparrowhawk	2	19	0	0	0
VP2	09/05/2024	09:56	Sparrowhawk	1	6	0	0	0
VP1	19/06/2024	10:14	Sparrowhawk	1	15	3	0	0
VP1	19/06/2024	14:22	Sparrowhawk	1	0	0	139	0
VP1	09/07/2024	16:56	Sparrowhawk	1	21	0	0	0
VP2	26/07/2024	13:37	Sparrowhawk	1	17	0	0	0
VP1	03/10/2024	14:02	Sparrowhawk	1	32	9	0	0
VP1	06/11/2024	12:15	Sparrowhawk	1	14	4	0	0
VP1	29/11/2024	13:09	Sparrowhawk	1	0	18	81	0
VP1	29/11/2024	15:57	Sparrowhawk	1	16	0	0	0
VP2	31/01/2025	13:07	Sparrowhawk	1	20	48	0	0
VP2	13/03/2025	08:46	Sparrowhawk	1	0	83	0	0

## 4.3 Stage A: Flight Activity

### Aerial bird density

In order to calculate the aerial bird density (D.) for sparrowhawk, the following formula was used:

$$DA = b / (t \times A) \text{ bird-seconds m}^2$$

To calculate parameter b, the number of ‘bird-seconds’ per month per vantage point was calculated by multiplying the number of birds aloft by the duration of the flight (in seconds). This included time spent in all recorded height bands, not just those bands within potential collision height. These values are presented in Table 7 - 6 - 34. Note that sparrowhawk was not recorded in every month, therefore some months are not present in the table.

Table 7 - 6 - 34 Bird-seconds per vantage point per month

Month	Vantage Point	Bird-Seconds
Jan	VP1	58
Mar	VP1	62
May	VP1	38
Jun	VP1	157
Jul	VP1	21

Month	Vantage Point	Bird-Seconds
Oct	VP1	41
Nov	VP1	133
Jan	VP2	155
Feb	VP2	35
Mar	VP2	83
May	VP2	6
Jul	VP2	17
Nov	VP2	17

Parameter  $t$ , the time that the vantage point was watched, was obtained from the survey effort. The breakdown of survey time at each vantage point is presented in Table 7 - 6 - 35.

Table 7 - 6 - 35 Survey time at each vantage point in hours and seconds according to month

Vantage Point	Month	Time in hours	Time in seconds
VP1	Jan	12	43200
VP2	Jan	12	43200
VP1	Feb	12	43200
VP2	Feb	12	43200
VP1	Mar	12	43200
VP2	Mar	12	43200
VP1	Apr	12	43200
VP2	Apr	12	43200
VP1	May	12	43200
VP2	May	12	43200
VP1	Jun	12	43200
VP2	Jun	12	43200
VP1	Jul	12	43200
VP2	Jul	12	43200
VP1	Aug	12	43200
VP2	Aug	12	43200
VP1	Sep	12	43200
VP2	Sep	12	43200
VP1	Oct	12	43200
VP2	Oct	12	43200
VP1	Nov	12	43200
VP2	Nov	12	43200
VP1	Dec	12	43200
VP2	Dec	12	43200

Parameter  $A$  is the entire area of the vantage point viewsheds. As described above, these were:

- > VP1 = 5.23km<sup>2</sup>
- > VP2 = 5.92km<sup>2</sup>

The aerial bird density ( $D_A$ ) was calculated for all vantage points, and then a mean value was obtained for each month. For example,  $D_A$  for January was calculated as:

**VP1**



b = 58  
t = 43200  
A = 5.23  
D<sub>λ</sub> = 0.0002563467

**VP2**

b = 155  
t = 43200  
A = 5.92  
D<sub>λ</sub> = 0.0006055715

**Mean D<sub>λ</sub> for the month of January**

$$(0.0002563467 \times 0.0006055715) / 2 = 0.0004309591$$

D<sub>λ</sub> for all months is presented in Table 7 - 6 - 36. Zero is input for months in which sparrowhawk was not recorded.

Table 7 - 6 - 36 Aerial bird density

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.0004	0.0001	0.0003	0	0.0001	0.0003	0.0001	0	0	0.0001	0.0003	0

**Proportion of birds flying at risk height**

The proportion of sparrowhawk flying at risk height (Q<sub>R</sub>) was calculated from the survey data in Table 7 - 6 - 33. Note that non-flight records are excluded from this calculation.

First, for each height band, the proportion of flights within that band relative to the total number of flights was calculated. Second, the proportion of each height band overlapping the rotor risk height (30-180m) was determined. Finally, these two proportions were multiplied. The workings for Band 3 (25-200m) are below.

**Band 3**

Total number of sparrowhawk flights = 17  
Total number of sparrowhawk flights in band = 3  
Proportion of flights in band = 0.176  
Proportion of band overlapping rotor risk height = 0.858  
0.176 X 0.858 = 0.151

This calculation was made for all bands. Then, the result from each band was summed to provide a total proportion of birds flying at risk height. Note that the result for bands that do not overlap with rotor risk height will be 0. Because Band 3 was the only band that overlapped with rotor risk height in this example, the final proportion of birds flying at risk height (Q<sub>R</sub>) was 0.151 or 15.1%.

**Photoperiod**

The photoperiod at the latitude of the site was acquired for the survey period. The daylight and nighttime hours per month (t<sub>day</sub> and t<sub>night</sub> respectively) are shown in Table 7 - 6 - 37. The total daylight hours was 4,487.093 and night-time hours was 4,272.907.

Table 7 - 6 - 37 Photoperiod

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Daylight Hours	251.5	273.7	366.3	418.6	491.5	507.3	510.3	459.0	382.6	329.7	261.0	235.6
Nighttime Hours	492.5	398.3	377.7	301.4	252.5	212.7	233.7	285.0	337.4	414.3	459.0	508.4

4.4

## Stage B: Number of Flights Through Rotors

To estimate the number of sparrowhawk flights through the rotors, firstly the total rotor frontal area for all turbines was calculated as:

$$\text{rotor frontal area} = T \pi R^2$$

where  $T$  is the number of turbines. In this example, that is  $7 \times \pi \times 75^2 = 123700.2\text{m}^2$

Sparrowhawk biometrics were taken from the best available literature:

- > Length ( $l$ ) = 0.33m
- > Wingspan ( $w$ ) = 0.625m
- > Flight speed ( $v$ ) = 10m/s
- > Flight type = flapping
- > Nocturnal activity ranking ( $f_{\text{night}}$ ) = 1 (0% nighttime activity)

Using the values from previous sections, the density ( $D_v$ ) for each month was calculated as:

$$D_v = (D_s \times Q_s R) / (2 \times R)$$

Then the projected number of transits through the rotor risk area was calculated as:

$$\text{transits} = v \times D_v \times \text{rotor frontal area} \times ((t_{\text{day}} + (t_{\text{night}} \times (f_{\text{night}}/100))) \times 3600)$$

In this example, the density for the month of January was  $(0.0004 \times 0.151) / (2 \times 75) = 4.349921^{-13}$

The number of transits for the month of January was  $10 \times 4.349921^{-13} \times 123700.2 \times ((251.519 + (492.481 \times (0/100))) \times 3600) = 0.4872201$ . Table 7 - 6 - 38 shows the projected number of transits for all months. Note that a zero is input for months in which sparrowhawk was not recorded.

Table 7 - 6 - 38 Number of transits per month

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.487	0.084	0.493	0	0.211	0.791	0.183	0	0	0.134	0.384	0

4.5

## Stage C: Probability of Collision

The probability of a sparrowhawk collision during a single rotor transit was calculated. Sparrowhawk biometrics, flight behaviour and the turbine specifications outlined in the previous sections were used to define how the bird interacts with the moving blades and derive the geometric parameters described below. Collision probability was determined separately for upwind and downwind flight directions. It was calculated as a function of radial position across the rotor disc, at increments of 0.05 from 0.05 to 1.0 (excluding the rotor centre).

At each radial position, collision probability was calculated for flight angles at increments of  $10^\circ$  from  $0^\circ$  to  $180^\circ$ , which assumes a uniform distribution of bird approach angles. For each flight angle, the flight angle ( $\Phi$ ) was converted from degrees to radians and turbine rotation speed ( $\Omega$ ) was converted from rpm to radians per second. The dimensionless radial position (*radius*) was converted to an absolute distance from the hub in metres. Then, the blade chord width at the radial position was estimated by interpolating the blade profile and scaling it by the maximum chord width, to reflect blade width changes from hub to tip. Flight direction ( $d$ ) was set as 1 for upwind flight directions and -1 for downwind.

A standard dimensionless blade encounter rate multiplier was defined as:

$$b \Omega / 2 \pi v$$

where  $b$  is number of blades,  $\Omega$  is rotation speed (now in  $\text{rad s}^{-1}$ ), and  $v$  is bird flight speed.

The ratio of bird speed to blade tangential speed ( $\alpha$ ) was calculated as:

$$\alpha = v/\text{radius } \Omega$$

The blade pitch ( $\lambda$ ) was converted from degrees to radians to obtain the blade tilt angle ( $\theta$ ) relative to the rotor plane:

$$\theta = \lambda\pi/180$$

Using these values, two collision lengths were calculated. The first was a blade-related component (accounting for blade chord width [ $c$ ], blade tilt [ $\theta$ ], bird flight direction [ $d$ ] and the ratio of bird speed to blade tangential speed [ $\alpha$ ]), which represents the effective ‘interaction length’ associated with blade motion and geometry:

$$|d c \sin(\theta) + \alpha c \cos(\theta)|$$

The second was a bird-size-related component (accounting for body length [ $l$ ], wingspan [ $w$ ] and flight type):

$$\max(l, w_{\text{eff}} \alpha)$$

Here,  $w_{\text{eff}}$  is the effective wingspan. For flapping flight, the full wingspan was used, but for gliding flight, the wingspan would be reduced by the absolute value of the cosine of the flight angle relative to the rotor plane ( $\Phi$ ) to represent the reduced projected cross-section when the bird’s wings are angled relative to the rotor plane.

Finally, the collision probability was calculated as the blade encounter rate multiplier multiplied by the sum of the two collision lengths. The result is capped at a maximum of 1 so that probabilities cannot exceed 100%. This collision probability was then averaged over the flight angles at the radial position. The upwind and downwind collision probabilities calculated for each radial position for sparrowhawk are presented in Table 7 - 6 - 39.

Table 7 - 6 - 39 Upwind and downwind collision probabilities

Radial Position	Upwind	Downwind
0.05	0.486082	0.449547
0.1	0.269631	0.230093
0.15	0.204551	0.160508
0.2	0.171557	0.123511
0.25	0.1502	0.100152
0.3	0.130199	0.081152
0.35	0.11173	0.065686
0.4	0.096588	0.054047
0.45	0.086103	0.046065
0.5	0.077465	0.039929
0.55	0.070171	0.035137
0.6	0.06319	0.031159
0.65	0.057052	0.028024
0.7	0.051576	0.025551
0.75	0.047235	0.023713
0.8	0.042698	0.022178
0.85	0.039644	0.021126

Radial Position	Upwind	Downwind
0.9	0.035181	0.020167
0.95	0.031534	0.019522
1	0.01881	0.01881

Next, the collision probabilities were averaged for flights through the rotor disk for upwind values and downwind values as follows:

$$P = 2[(i=1 \sum_{n=1}^n p_r) + 2p_n] \Delta r$$

Where  $P$  is the mean single-transit collision probability (upwind or downwind),  $r_i$  is the radial position,  $p_r$  is the collision probability at radial position  $r_i$ ,  $p_n$  is the collision probability at the outermost radial position (i.e., the blade tip),  $\Delta r = 0.05$  (i.e., the radial increments) and  $n$  is the number of evaluated radial positions

The average collision risk for flights through the rotor when moving upwind was calculated as 0.0672, and for downwind as 0.0402. A 50:50 weighting of upwind and downwind flight was assumed. Thus, the final probability of a sparrowhawk collision during a single rotor transit was calculated as the weighted average of these two estimates. The estimated probability of collision for a sparrowhawk during a single rotor transit was 0.0537.

## 4.6 Stage D Expected Collisions

The outputs of stage B and C were multiplied to yield the expected collision rate for sparrowhawk, and the product was multiplied by the proportion of time the wind farm is expected to be operational. In this example, the expected collisions for January was calculated as:

$$0.487 \times 0.0537 \times 0.85 = 0.02224467$$

The predicted number of collisions for each month is presented in Table 7 - 6 - 40. Note that these rates assume no avoidance of turbines or wind farms by sparrowhawk.

Table 7 - 6 - 40 Expected collisions per month (without avoidance)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.022	0.004	0.023	0.000	0.010	0.036	0.008	0.000	0.000	0.006	0.018	0.000

## 4.7 Stage E Allowing for Avoidance and Attraction

Stage E of the modelling process takes account of the proportion of sparrowhawk likely to avoid the wind farm or its turbines. This is calculated for a range of avoidance factors: 95%, 98%, 99% and 99.5%. The expected collisions per month calculated in stage D are multiplied by the avoidance rates to provide a collision rate with avoidance. These values are presented in Table 7 - 6 - 41.

Table 7 - 6 - 41 Expected collisions per month (with avoidance)

Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.95	0.001 1	0.000 2	0.001 1	0.000 0	0.000 5	0.001 8	0.000 4	0.000 0	0.000 0	0.000 3	0.000 9	0.000 0
0.98	0.000 4	0.000 1	0.000 5	0.000 0	0.000 2	0.000 7	0.000 2	0.000 0	0.000 0	0.000 1	0.000 4	0.000 0
0.99	0.000 2	0.000 0	0.000 2	0.000 0	0.000 1	0.000 4	0.000 1	0.000 0	0.000 0	0.000 1	0.000 2	0.000 0

Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.995	0.000 1	0.000 0	0.000 1	0.000 0	0.000 1	0.000 2	0.000 0	0.000 0	0.000 0	0.000 0	0.000 1	0.000 0

4.8

## Stage F: Uncertainty

To provide a measure of uncertainty in aerial density ( $u1$ ), the relative standard error for the monthly values was used. First, the mean aerial density ( $\bar{D}_x$ ) for all months was calculated to be 0.0001445. Then, the standard error of the mean (SEM) was calculated as:

$$SEM = s / \sqrt{n}$$

where  $s$  is the standard deviation of the monthly values and  $n$  is the number of months being considered. In this example:

$$0.00015 / \sqrt{12} = 0.000044$$

Finally, to express this as a proportion uncertainty, the relative standard error (RSE) was calculated as:

$$RSE = SEM / \bar{D}_x$$

Note that zero values (i.e., months in which the sparrowhawk was not recorded, such as April) were retained in this equation as they may represent true absence or intermittent use of the site. If a large proportion of zero values were to occur (i.e., the species was recorded infrequently during vantage point surveys), this will increase the RSE. In this example the proportion uncertainty (RSE) was:

$$0.000044 / 0.0001445 = 0.3039$$

Uncertainty due to simplifications in the collision risk model ( $u2$ ) was assumed to be 20% (Band, 2024). Finally, uncertainty due to design options ( $u3$ ) was considered to be 28%, as 4 of 14 turbine specifications were either not finalised or were approximate (blade profile, pitch, rotational speed and expected time operational). The overall range of uncertainty ( $u$ ) was thus:

$$\sqrt{(u1^2 + u2^2 + u3^2)}$$

In this example, that is:

$$\sqrt{(0.3^2 + 0.2^2 + 0.28^2)} = 0.46$$

Expressed as a percentage, the overall uncertainty was 46%.

4.9

## Worked Example Collision Rates

To provide a best estimate of the collision rate for sparrowhawk, the guidance on avoidance rates provided by NatureScot in NatureScot (2025b) was consulted. This guidance recommends a 98% avoidance rate for sparrowhawk. As such the predicted number of collisions corresponding to a 98% avoidance rate was identified and is presented in Table 7 - 6 - 42, along with the range of uncertainty and an estimation of the number of years for one collision to occur.

The column 'Annual Collision Rate' in Table 7 - 6 - 42 presents the final predicted annual collision rate for sparrowhawk that would be used in the impact assessment for this proposed development scenario: 0.0025 sparrowhawk per year. Due to the uncertainties discussed in stage F, this may range from 0.0011 to 0.0039 sparrowhawk per year. Dividing 1 by 0.0025 provides the number of years it would be expected for a collision to occur based on the model predictions.

Table 7-6 - 42 Predicted annual collision rate

Species	Annual Collision Rate	Range of Uncertainty	Years to one collision
Sparrowhawk	0.0025	0.0011-0.0039	395

5.

## BIBLIOGRAPHY

Band, W. (2024). Using a collision risk model to assess bird collision risks for onshore wind farms. NatureScot Research Report 909. NatureScot, Inverness, Scotland. Available at: <https://www.nature.scot/doc/naturescot-research-report-909-using-collision-risk-model-assess-bird-collision-risks-onshore-wind> (accessed 18/02/2026)

NatureScot (2025a). Recommended bird survey methods to inform impact assessment of onshore windfarms. NatureScot, Inverness, Scotland. Available at: <https://www.nature.scot/doc/recommended-bird-survey-methods-inform-impact-assessment-onshore-windfarms> (accessed 18/02/2026)

NatureScot (2025b). Wind farm impacts on birds - Use of Avoidance Rates in the NatureScot Wind Farm Collision Risk Model. NatureScot, Inverness, Scotland. Available at: <https://www.nature.scot/doc/wind-farm-impacts-birds-use-avoidance-rates-naturescot-wind-farm-collision-risk-model> (accessed 18/02/2026)